


电机测试报告

客户名称(Customer): 额定电压(Voltage):
 客户档案(Filename): 205 50h 24x5 相电流350a 160度 s 额定功率(Police Rated) 测试人员(Tester):
 电机型号(Type): 测试日期(Test Date): 2016.05.10
 电机编号(Number):

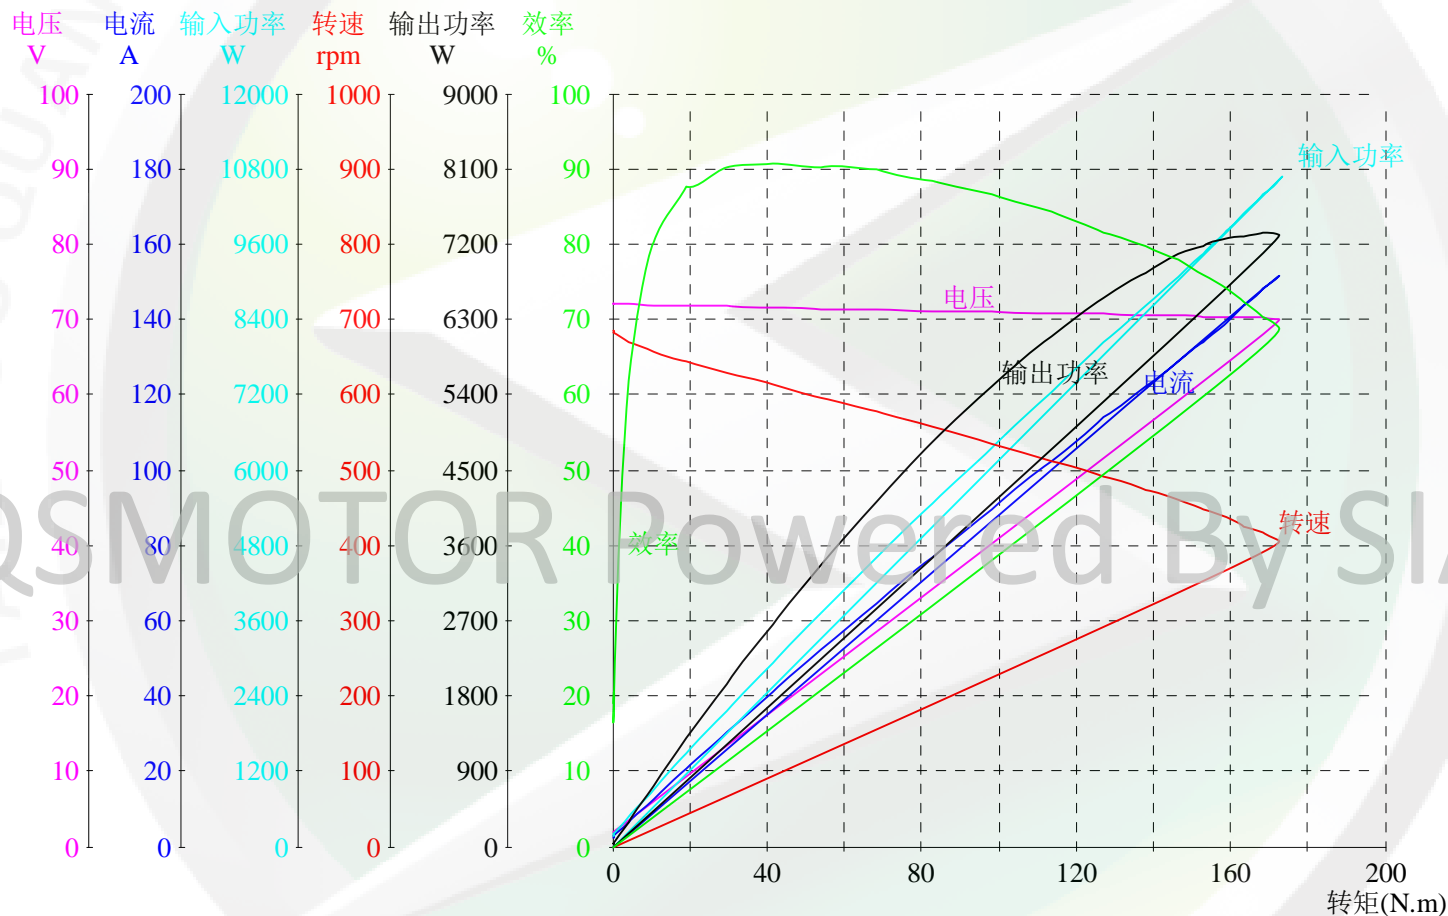

特征点	电压	电流	输入功率	转矩	转速	输出功率	效率
	V	A	W	N. m	rpm	W	%
不加载点	72.19	2.292	165.5	0.4	684.1	31.51	19.0
最高效率点	71.58	40.93	2930	41.3	614.3	2658	90.7
最大输出功率点	70.13	150.1	10530	171.4	408.5	7330	69.6
最大转矩点	70.05	154.1	10796	174.8	398.8	7298	67.6
结束点	1.830	0.000	0.00	0.2	0.0	0.00	0.0

电机测试报告

客户名称(Customer): 额定电压(Voltage):
 客户档案(Filename): 205 50h 24x5 相电流350a 160度 s 额定功率(Power):
 电机型号(Type): 测试人员(Tester):
 电机编号(Number): 测试日期(Test Date): 2016.05.10

序号	电压 V	电流 A	输入功率 W	转矩 N.m	转速 rpm	输出功率 W	效率 %
1	72.19	2.292	165.5	0.4	684.1	31.51	19.0
2	72.16	2.274	164.1	0.4	684.2	34.38	20.9
3	72.17	2.307	166.5	0.5	684.1	36.67	22.0
4	72.12	2.819	203.3	0.4	682.7	33.73	16.5
5	72.05	3.651	263.1	1.4	679.5	101.3	38.5
6	71.98	5.026	361.7	2.6	674.6	189.8	52.4
7	71.95	6.547	471.1	4.1	669.1	291.9	61.9
8	71.94	8.320	598.5	5.9	666.2	413.4	69.0
9	71.91	10.46	752.7	8.5	661.6	589.0	78.2
10	71.90	12.72	915.0	10.6	657.0	734.6	80.2
11	71.87	15.07	1083	13.3	652.0	908.7	83.8
12	71.86	17.91	1287	16.1	647.2	1091	84.7
13	71.81	20.72	1488	19.3	643.0	1304	87.6
14	71.77	23.80	1708	22.2	638.6	1489	87.1
15	71.73	27.00	1937	26.1	633.9	1737	89.6
16	71.69	30.15	2161	29.6	628.2	1948	90.1
17	71.66	33.58	2406	33.3	624.8	2184	90.7
18	71.61	37.15	2660	37.1	620.0	2409	90.5
19	71.58	40.93	2930	41.3	614.3	2658	90.7
20	71.52	44.41	3177	45.2	607.4	2880	90.6
21	71.48	48.38	3458	49.4	602.0	3119	90.1
22	71.42	52.14	3724	53.9	595.8	3364	90.3
23	71.36	56.34	4020	59.0	589.8	3646	90.6
24	71.33	60.24	4297	63.2	584.1	3867	89.9
25	71.28	64.47	4595	68.2	577.7	4130	89.8
26	71.23	68.44	4876	72.9	569.3	4346	89.1
27	71.17	73.05	5199	78.1	563.9	4611	88.7
28	71.13	76.96	5474	83.0	556.6	4839	88.3
29	71.09	81.54	5796	88.3	549.1	5079	87.6
30	71.04	85.75	6091	93.6	542.2	5316	87.2
31	70.96	89.67	6364	98.4	534.7	5509	86.5
32	70.90	94.47	6698	103.6	528.0	5730	85.5
33	70.84	98.49	6978	108.9	520.2	5936	85.0
34	70.81	102.2	7241	113.7	512.2	6100	84.2
35	70.75	106.1	7510	118.4	505.2	6267	83.4
36	70.71	110.0	7784	123.1	498.5	6429	82.5
37	70.67	113.8	8043	127.1	491.9	6548	81.4
38	70.64	116.6	8239	131.4	485.7	6686	81.1
39	70.59	119.6	8446	134.7	480.4	6778	80.2
40	70.56	122.0	8611	138.1	474.3	6860	79.6
41	70.53	124.4	8778	141.0	469.7	6938	79.0
42	70.51	126.5	8925	143.7	465.6	7008	78.5
43	70.47	128.7	9075	146.6	461.1	7078	77.9
44	70.44	130.9	9223	149.1	456.1	7124	77.2
45	70.42	132.7	9346	150.9	452.4	7152	76.5
46	70.39	134.1	9446	153.0	447.5	7171	75.9
47	70.37	136.1	9582	155.2	445.0	7235	75.5
48	70.35	137.6	9686	157.3	439.8	7244	74.7

电机测试报告

客户名称(Customer): 额定电压(Voltage):
 客户档案(Filename): 205 50h 24x5 相电流350a 160度 s 额定功率(P01605R04d) 测试人员(Tester):
 电机型号(Type): 测试日期(Test Date): 2016.05.10
 电机编号(Number):

序号	电压 V	电流 A	输入功率 W	转矩 N.m	转速 rpm	输出功率 W	效率 %
49	70.32	139.2	9796	158.8	436.4	7257	74.0
50	70.30	141.0	9915	160.7	432.8	7284	73.4
51	70.27	142.4	10012	162.2	429.2	7289	72.8
52	70.24	143.8	10102	163.6	426.0	7301	72.2
53	70.22	145.4	10215	165.5	422.3	7318	71.6
54	70.20	146.4	10278	166.9	418.6	7316	71.1
55	70.16	148.2	10404	168.2	415.9	7326	70.4
56	70.15	149.0	10454	169.8	412.0	7326	70.0
57	70.13	150.1	10530	171.4	408.5	7330	69.6
58	70.10	151.4	10619	172.2	405.8	7318	68.9
59	70.08	152.8	10712	173.8	402.3	7323	68.3
60	70.05	154.1	10796	174.8	398.8	7298	67.6
61	1.830	0.000	0.00	0.2	0.0	0.00	0.0

QSMOTOR Powered By SIA

QSMOTOR