


电机测试报告

客户名称(Customer): 额定电压(Voltage):
 客户档案(Filename): 10 206 ZN72v3000w 2098183 956 额定功率(Power (Rated):
 电机型号(Type): 测试人员(Tester):
 电机编号(Number): 测试日期(Test Date): 2014.09.22

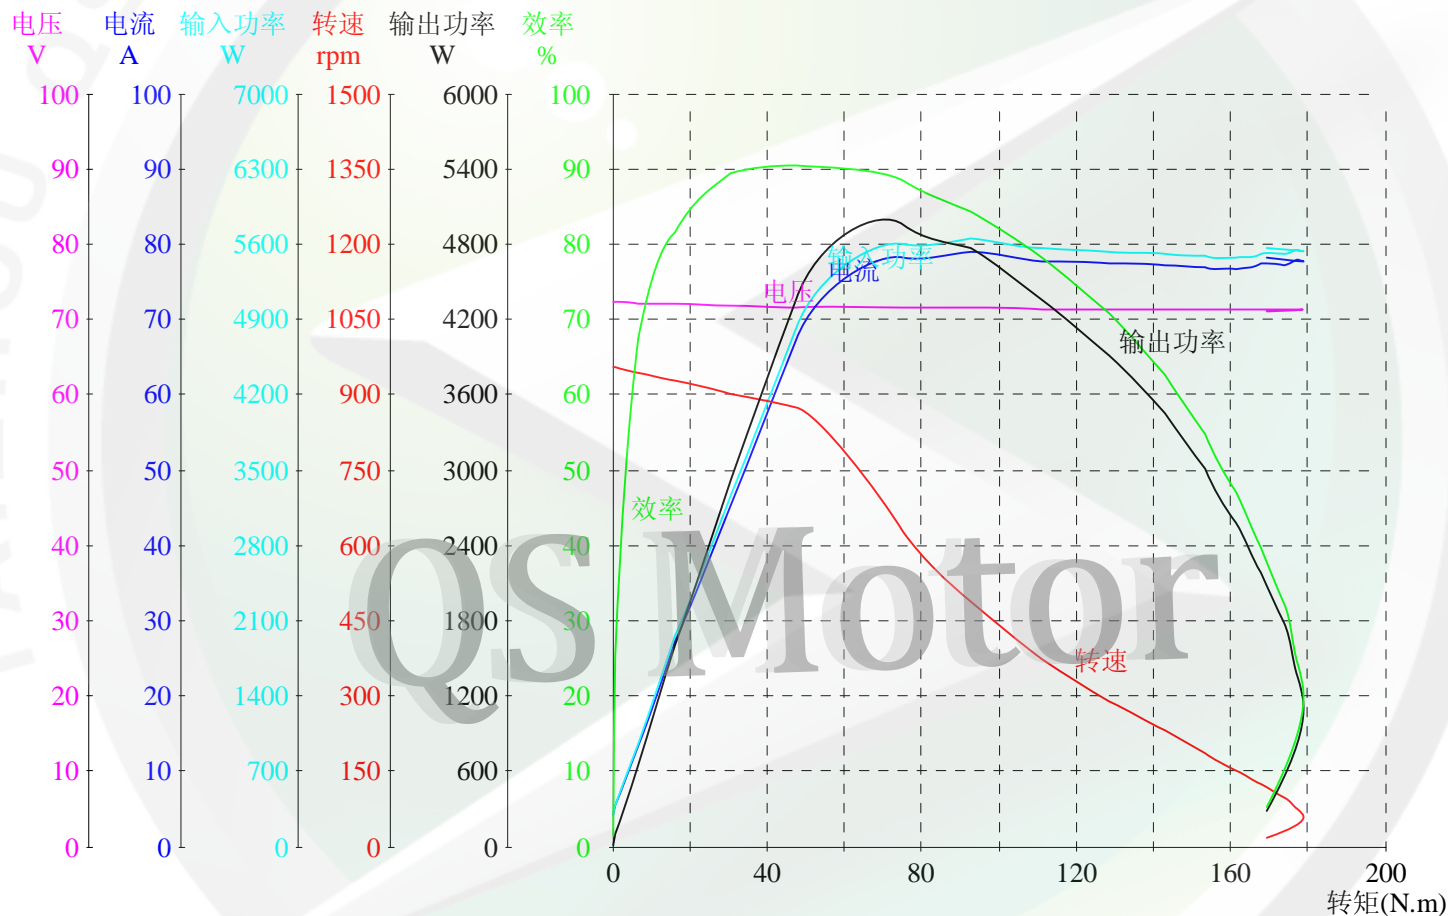

特征点	电压	电流	输入功率	转矩	转速	输出功率	效率
	V	A	W	N. m	rpm	W	%
不加载点	72.36	4.204	304.2	0.0	956.5	4.00	1.3
最高效率点	71.56	67.15	4805	47.5	873.3	4351	90.5
最大输出功率点	71.52	79.05	5654	69.0	704.6	5097	90.1
最大转矩点	71.24	77.53	5524	182.2	52.9	1009	18.2
结束点	71.17	78.14	5560	169.2	16.4	290.5	5.2

电机测试报告

客户名称(Customer): 额定电压(Voltage):
 客户档案(Filename): 10 206 ZN72v3000w 2098183 956 额定功率(Power):
 电机型号(Type): 测试人员(Tester):
 电机编号(Number): 测试日期(Test Date): 2014.09.22

序号	电压 V	电流 A	输入功率 W	转矩 N.m	转速 rpm	输出功率 W	效率 %
1	72.36	4.204	304.2	0.0	956.5	4.00	1.3
2	72.34	4.193	303.4	0.0	956.2	6.40	2.1
3	72.34	4.568	330.5	0.3	956.2	30.43	9.2
4	72.32	5.418	391.8	0.9	954.7	99.15	25.3
5	72.30	7.237	523.2	2.2	952.1	224.8	42.9
6	72.25	9.960	719.7	4.1	948.8	411.6	57.1
7	72.19	13.34	963.6	6.5	944.4	650.2	67.4
8	72.15	17.34	1251	9.6	939.1	943.9	75.4
9	72.09	21.90	1579	12.9	932.6	1263	80.0
10	72.02	27.11	1953	16.4	926.9	1595	81.6
11	71.96	32.75	2356	21.0	919.4	2030	86.1
12	71.89	38.93	2799	25.6	910.9	2450	87.5
13	71.80	45.30	3253	30.8	902.0	2912	89.5
14	71.73	52.26	3749	36.1	893.7	3385	90.2
15	71.64	59.46	4260	41.6	884.1	3858	90.5
16	71.56	67.15	4805	47.5	873.3	4351	90.5
17	71.76	74.64	5356	53.2	868.6	4838	90.3
18	71.52	79.05	5654	69.0	704.6	5097	90.1
19	71.51	78.28	5598	75.4	627.4	4959	88.5
20	71.49	77.75	5558	80.9	569.1	4823	86.7
21	71.46	78.61	5618	87.0	527.8	4813	85.6
22	71.45	78.98	5643	93.0	489.2	4763	84.4
23	71.44	78.91	5637	99.0	449.4	4661	82.6
24	71.44	77.97	5570	105.0	407.7	4486	80.5
25	71.42	77.78	5555	111.1	374.3	4355	78.3
26	71.41	77.76	5553	117.0	344.1	4218	75.9
27	71.38	77.58	5537	122.8	315.8	4062	73.3
28	71.36	77.45	5527	128.6	290.2	3909	70.7
29	71.33	77.31	5515	133.9	268.1	3759	68.1
30	71.33	77.39	5521	138.6	248.5	3606	65.3
31	71.34	77.28	5513	142.8	231.2	3456	62.6
32	71.31	77.08	5497	146.4	214.8	3292	59.8
33	71.30	76.96	5488	150.1	200.4	3149	57.3
34	71.28	76.92	5484	153.5	187.2	3008	54.8
35	71.30	76.51	5455	155.6	174.8	2848	52.2
36	71.28	76.87	5480	158.6	163.1	2708	49.4
37	71.28	76.72	5469	161.2	152.6	2576	47.1
38	71.29	77.04	5492	163.8	142.8	2450	44.6
39	71.29	76.58	5459	165.5	132.9	2303	42.1
40	71.25	77.37	5513	167.8	124.4	2185	39.6
41	71.27	77.42	5518	169.7	115.2	2047	37.1
42	71.26	77.39	5514	171.7	106.4	1912	34.6
43	71.25	77.22	5502	174.0	97.7	1779	32.3
44	71.26	77.31	5509	175.9	89.6	1650	29.9
45	71.24	77.72	5536	175.7	81.1	1492	26.9
46	71.22	77.88	5546	177.3	73.0	1355	24.4
47	71.24	77.62	5530	178.8	63.4	1186	21.4
48	71.24	77.53	5524	182.2	52.9	1009	18.2

电机测试报告

客户名称(Customer): 额定电压(Voltage):
客户档案(Filename): 10 206 ZN72v3000w 2098183 956 额定功率(Power):
电机型号(Type): 测试人员(Tester):
电机编号(Number): 测试日期(Test Date): 2014.09.22

	电压	电流	输入功率	转矩	转速	输出功率	效率
序号	V	A	W	N.m	rpm	W	%
49	71.17	78.14	5560	169.2	16.4	290.5	5.2

QS Motor

QSMOTOR